


TR1300/1 Extended Data Sheet



- **Frequency range:** 300 kHz - 1.3 GHz
- **Wide output power range:** -55 dBm to +3 dBm
- **Dynamic range:** 135 dB (10 Hz IFBW)
- **Measurement time per point:** 150 μ s per point, min typ.
- **9 logical channels with 8 traces** each max.
- **Automation programming** in Python, LabVIEW, MATLAB, .NET, etc.
- **Time domain and gating** conversion included
- **Frequency offset mode**, including vector mixer calibration measurements
- Up to **16,001 measurement points**
- Multiple **precision calibration** methods and automatic calibration

TR1300/1 Specifications¹

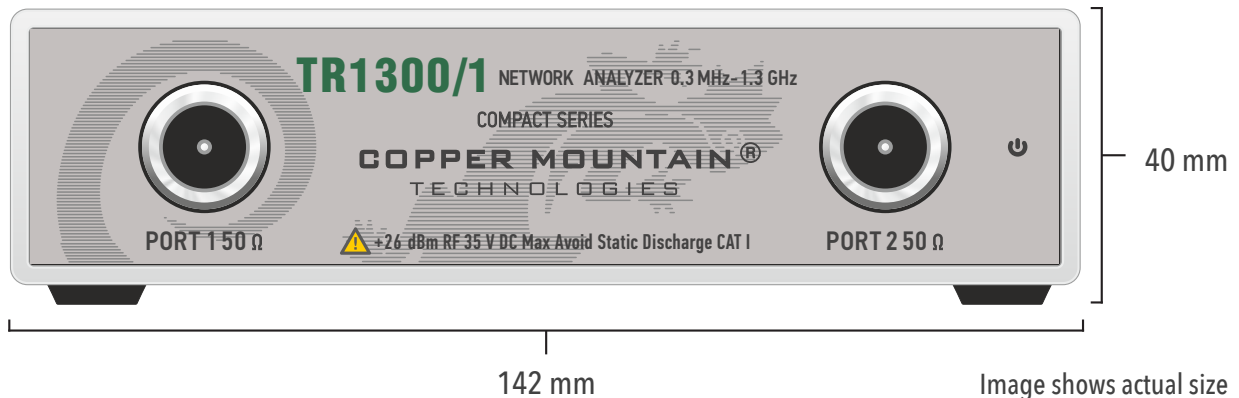

Primary Specifications

| | |
|---|-----------------------|
| Impedance | 50 Ohm |
| Test port connector | type N, female |
| Number of test ports | 2 |
| Frequency range | 300 kHz to 1.3 GHz |
| Full frequency accuracy | $\pm 5 \cdot 10^{-6}$ |
| Frequency resolution | 1 Hz |
| Number of measurement points | 2 to 16,001 |
| Measurement bandwidths (with 1/3 steps) | 10 Hz to 30 kHz |
| Dynamic range ² | 130 dB (135 dB typ.) |

Measurement Accuracy³

| Accuracy of transmission measurements ⁴ | Magnitude / Phase ($S_{11} = S_{22} = 0$) | Magnitude / Phase ($S_{11} = S_{22} = 0.1$) |
|--|--|--|
| +10 dB to +13 dB | ± 0.2 dB / $\pm 2^\circ$ | ± 0.2 dB / $\pm 2^\circ$ |
| -50 dB to +10 dB | ± 0.1 dB / $\pm 1^\circ$ | ± 0.15 dB / $\pm 1.5^\circ$ |
| -70 dB to -50 dB | ± 0.2 dB / $\pm 2^\circ$ | ± 0.2 dB / $\pm 2^\circ$ |
| -85 dB to -70 dB | ± 1.0 dB / $\pm 6^\circ$ | ± 1.0 dB / $\pm 6^\circ$ |
| Accuracy of reflection measurements ⁵ | Magnitude / Phase | |
| -15 dB to 0 dB | ± 0.4 dB / $\pm 4^\circ$ | |
| -25 dB to -15 dB | ± 1.5 dB / $\pm 7^\circ$ | |
| -35 dB to -25 dB | ± 4.0 dB / $\pm 22^\circ$ | |
| Trace noise magnitude (IF bandwidth 3 kHz) | 0.002 dB rms | |
| Temperature dependence | 0.02 dB/°C | |

Effective System Data

| 300 kHz to 1.3 GHz | |
|-----------------------|---------------|
| Directivity | 45 dB |
| Source match | 40 dB |
| Load match | 28 dB |
| Reflection tracking | ± 0.10 dB |
| Transmission tracking | ± 0.08 dB |


Uncorrected System Performance

| 300 kHz to 1.3 GHz | |
|--------------------|-------|
| Directivity | 18 dB |
| Source match | 15 dB |
| Load match | 28 dB |

Test Port Output

| | |
|------------------|-------------------|
| Power range | -55 dBm to +3 dBm |
| Power accuracy | ± 1.5 dB |
| Power resolution | 0.05 dB |

[1] All specifications subject to change without notice. [2] The dynamic range is defined as the difference between the specified maximum power level and the specified noise floor. The specification applies at 10 Hz IF bandwidth. [3] Reflection and transmission measurement accuracy applies over the temperature range of (73 \pm 9) °F or (23 \pm 5) °C after 40 minutes of warming-up, with less than 1 °C deviation from one-path two-port calibration temperature, at output power of -10 dBm. Frequency points have to be identical for measurement and calibration (no interpolation allowed). [4] Transmission specifications are based on a matched DUT, and IF bandwidth of 10 Hz. [5] Reflection specifications are based on an isolating DUT. © Copper Mountain Technologies - www.coppermountaintech.com - Rev. 2022Q2

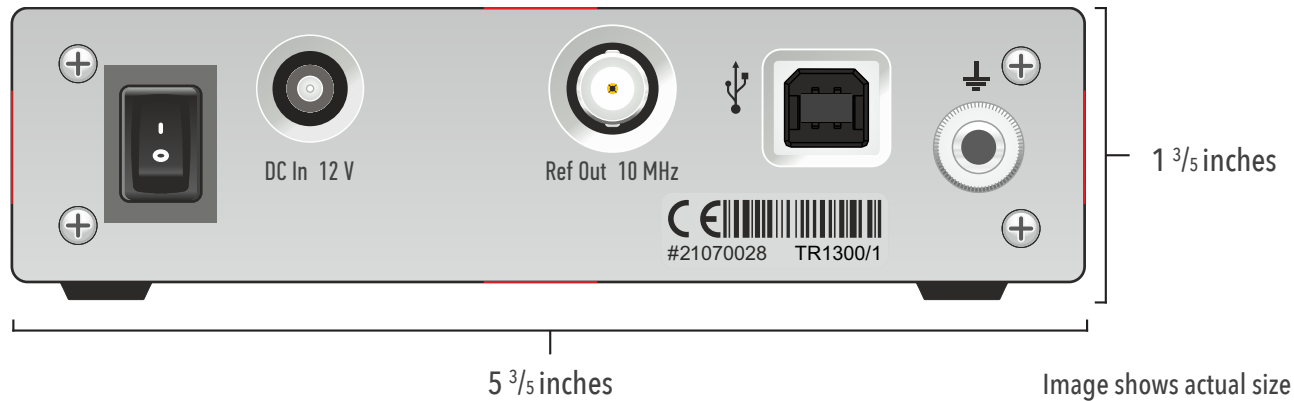

Test Port Input

| | |
|-------------------|-------------|
| Noise floor | -137 dBm/Hz |
| Damage level | +26 dBm |
| Damage DC voltage | 35 V |

Measurement Speed

| | |
|----------------|------------------|
| Time per point | 150 μ s typ. |
|----------------|------------------|

Frequency Reference Output

| | |
|---|----------------|
| Port | 10 MHz Ref Out |
| Internal reference frequency | 10 MHz |
| Output reference signal level at 50 Ohm impedance | 1 dBm to 5 dBm |
| Connector type | BNC, female |

System & Power

| | |
|---------------------------------|---------------------|
| Operating system | Windows 7 and above |
| CPU frequency | 1.5 GHz |
| RAM | 1 GB |
| Interface | USB 2.0 |
| Connector type | USB B |
| Input power (VNA) | 9 V DC to 15 V DC |
| Input power consumption (VNA) | 8 W |
| Power supply (Main Outlet) | 110-240 V, 50/60 Hz |
| Power consumption (Main Outlet) | 10 W |

Factory Adjustment

| | |
|---|---------|
| Recommended factory adjustment interval | 3 years |
|---|---------|

Dimensions


| | |
|--------|----------------|
| Length | 285 mm |
| Width | 142 mm |
| Height | 40 mm |
| Weight | 1.5 kg (53 oz) |

Environmental Specifications


| | |
|-----------------------|-------------------------------------|
| Operating temperature | +5 °C to +40 °C (41 °F to 104 °F) |
| Storage temperature | -50 °C to +70 °C (-58 °F to 158 °F) |
| Humidity | 90 % at 25 °C (77 °F) |
| Atmospheric pressure | 70.0 kPa to 106.7 kPa |

Reflection Accuracy Plots

Reflection Magnitude Errors

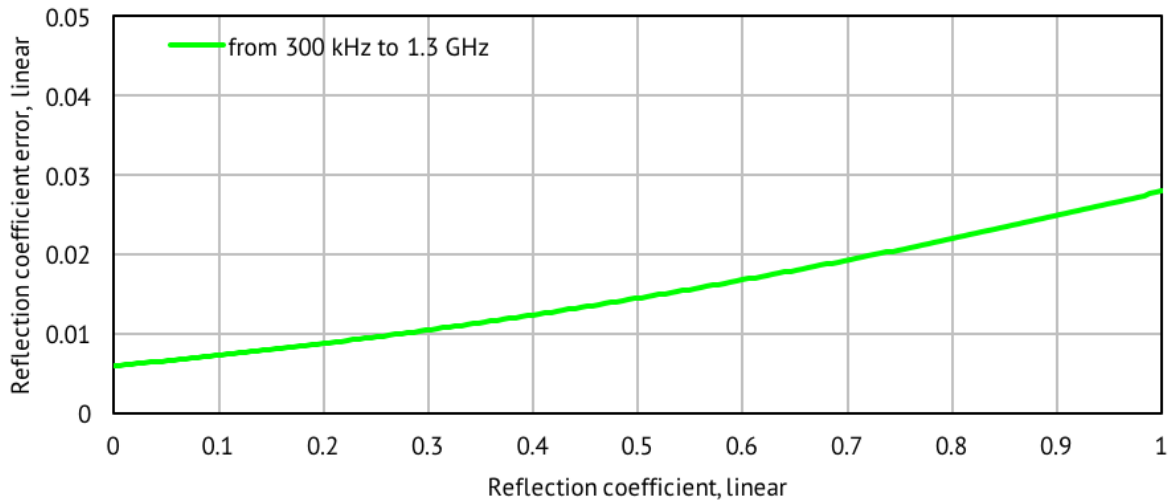


Specifications are based on isolating DUT ($S_{21} = S_{12} = 0$)

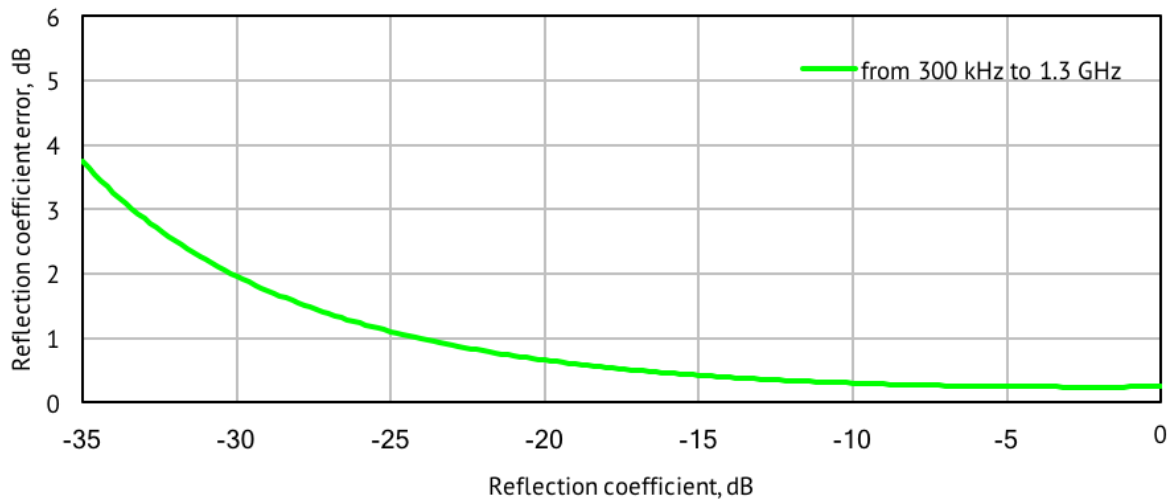

Specifications are based on isolating DUT ($S_{21} = S_{12} = 0$)


Reflection Accuracy Plots

Reflection Magnitude Errors

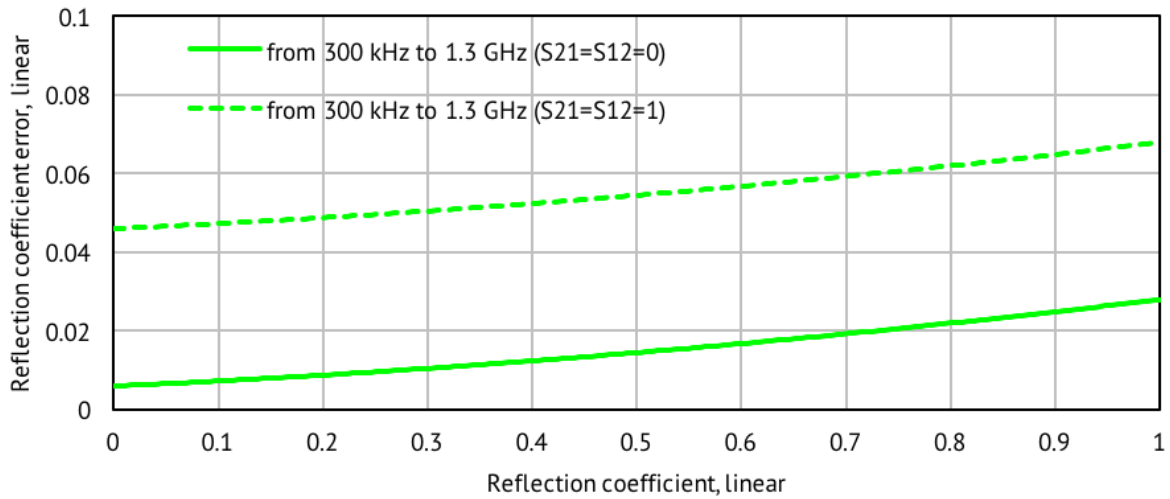


Reflection Accuracy Plots

Reflection Phase Errors

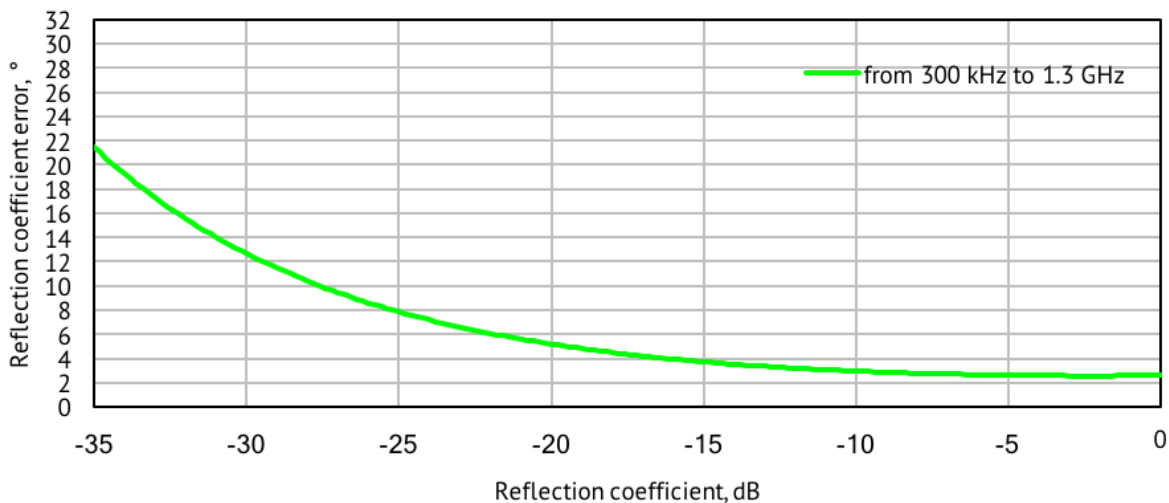


Specifications are based on isolating DUT ($S_{21} = S_{12} = 0$)

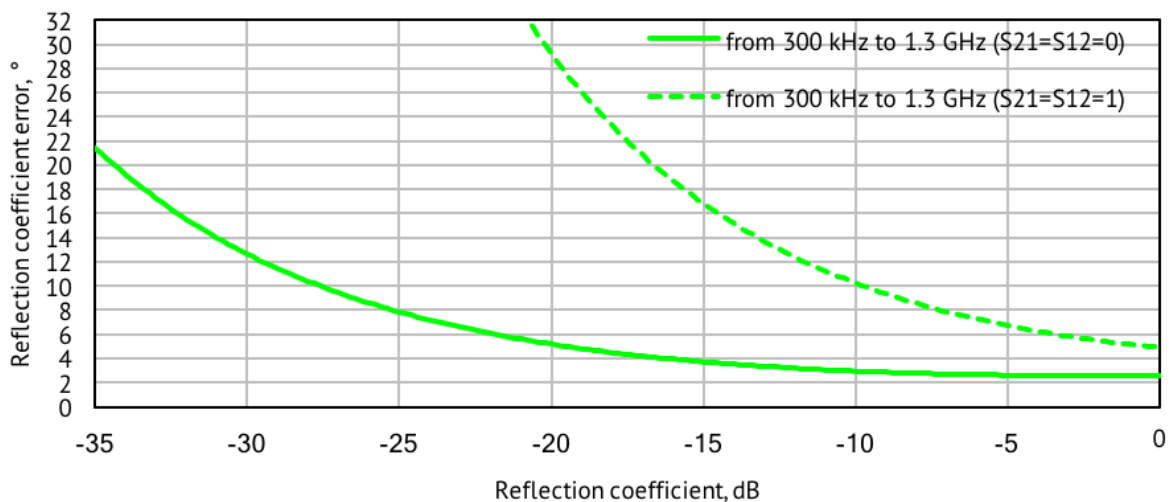


Transmission Accuracy Plots

Transmission Magnitude Errors

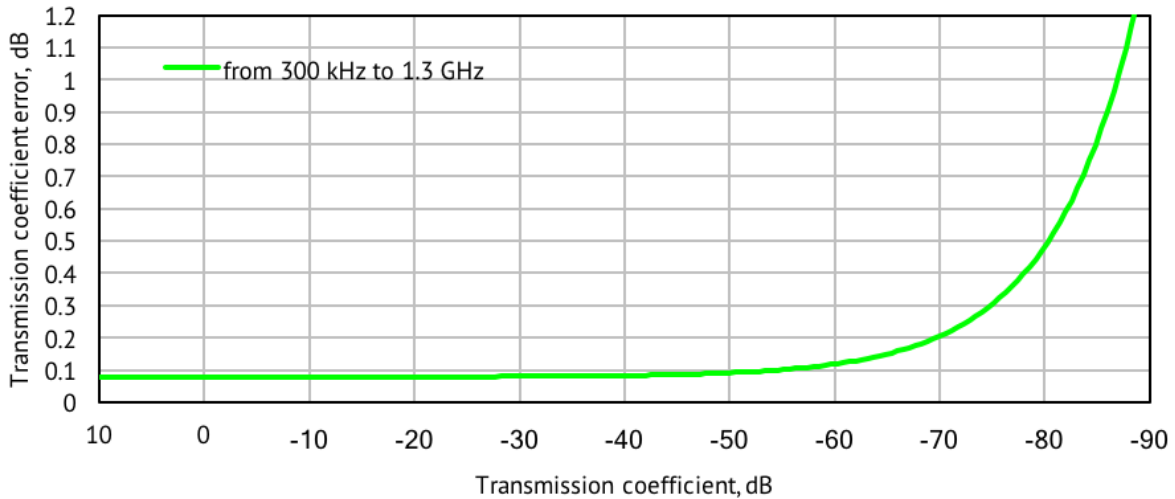

Specifications are based on matched DUT, and IF bandwidth of 10 Hz


Transmission Phase Errors

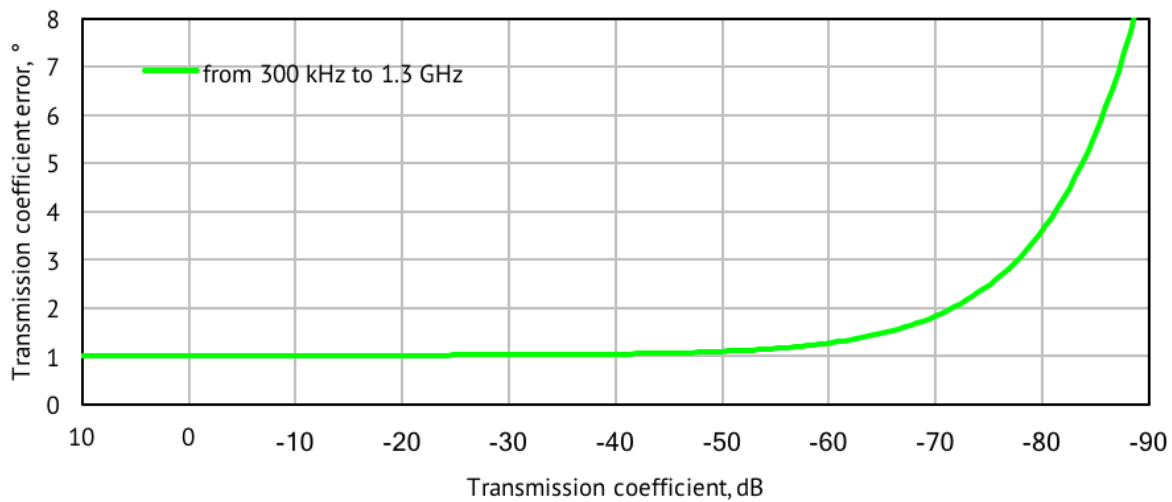


Specifications are based on matched DUT, and IF bandwidth of 10 Hz

Transmission Accuracy Plots

Transmission Phase Errors

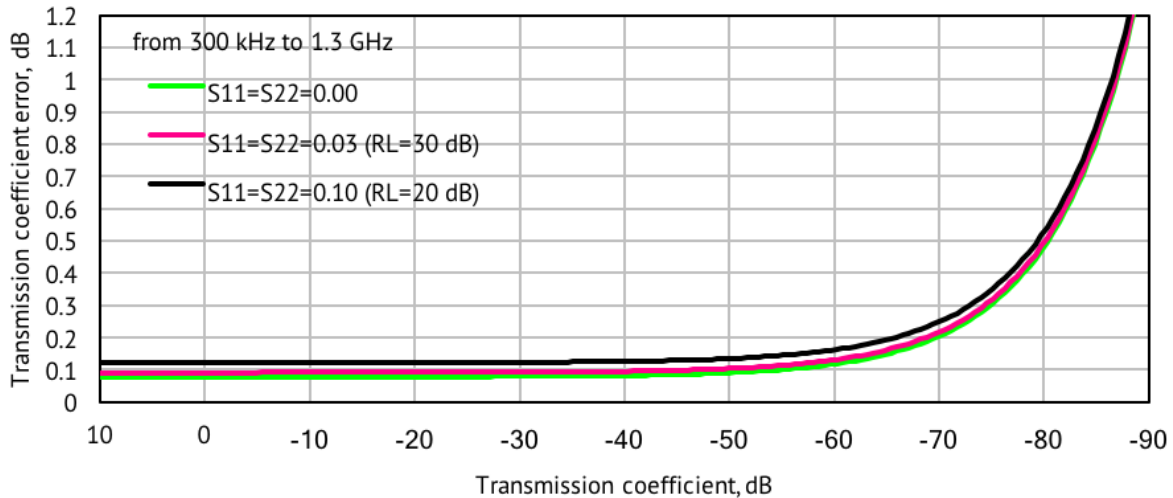


Transmission Phase Errors for Unmatched Devices

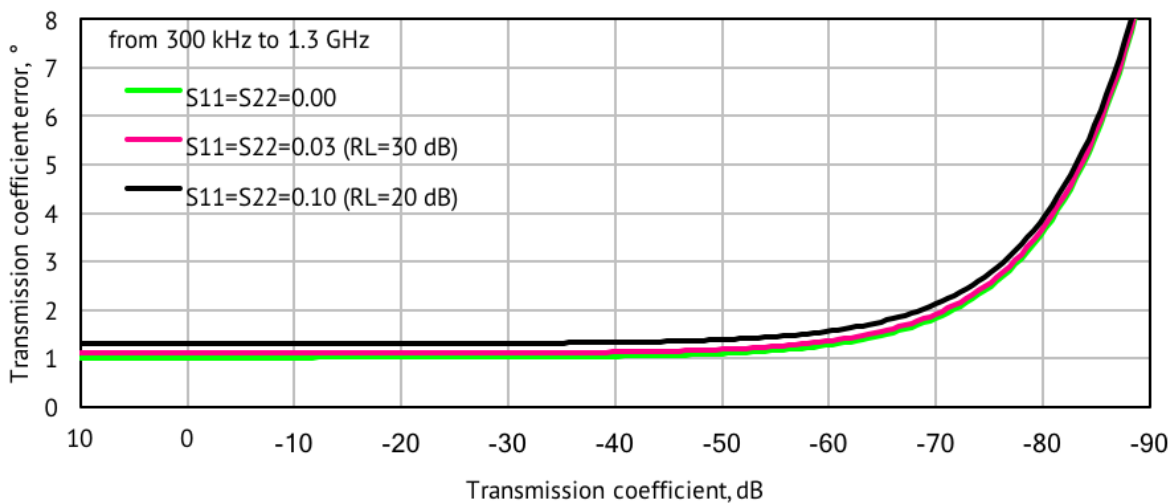

Specifications are based on matched DUT, and IF bandwidth of 10 Hz

Transmission Accuracy Plots

Transmission errors for matched devices vs Output power and IF Bandwidth

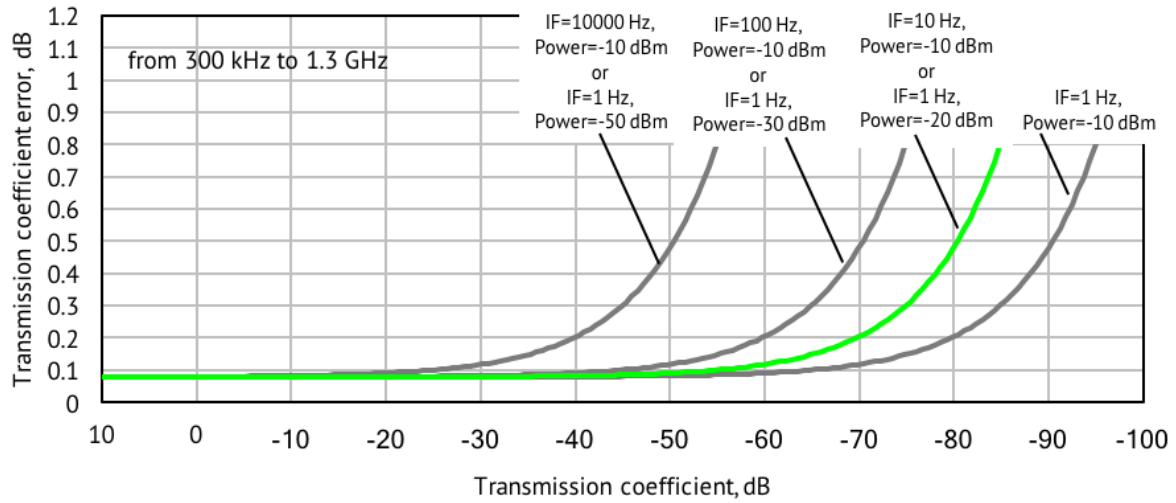



Technology is supposed to move. It's supposed to change and update and progress. It's not meant to sit stagnant year after year simply because that's how things have always been done.

The engineers at Copper Mountain Technologies are creative problem solvers. They know the people using VNAs don't just need one giant machine in a lab. They know that VNAs are needed in the field, requiring portability and flexibility. Data needs to be quickly transferred, and a test setup needs to be easily automated and recalled for various applications. The engineers at Copper Mountain Technologies are rethinking the way VNAs are developed and used.

Copper Mountain Technologies' VNAs are designed to work with the Windows or Linux PC you already use via USB interface. After installing the test software, you have a top-quality VNA at a fraction of the cost of a traditional analyzer. The result is a faster, more effective test process that fits into the modern workspace. This is the creativity that makes Copper Mountain Technologies stand out above the crowd.

 ***We're creative. We're problem solvers.***



Compact TR1300/1 Overview

| | TR1300/1 |
|-----------------|--------------------|
| Frequency Range | 300 kHz to 1.3 GHz |
| S-parameters | S11, S21 |
| Port Impedance | 50 Ohm |

631 E. New York Street
Indianapolis, IN 46202

United States: +1.317.222.5400
Latin America: +1.954.706.5920

APAC: +65.63.23.6546
EMEA: +44 75 03 69 21 13