


CMTBTHC65 Bias Tee

Broadband: 20 MHz to 6.5 GHz
 High Current Design Handles 3 Adc
 Low Insertion Loss

SMA Female Connectors
 Temp. Range: -55°C to 100°C
 Measured in a 50 Ω system

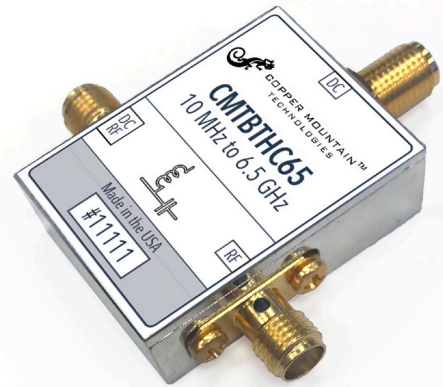

| | |
|--------------------------|-------------------------|
| Insertion Loss | 0.61 dB typ., 1 dB max |
| DC Port Isolation | 30 dB min, 35 dB typ. |
| Return Loss | 15 dB min, 18 dB typ. |
| VSWR | 1.40:1 min, 1.29:1 typ. |
| DC Current | 3000 mA |
| DC Voltage | 50 Vdc |
| DC Resistance | 30 mΩ |

